

The logo for ECOLINK, featuring the word "ECOLINK" in a bold, sans-serif font. The "ECO" part is green, and the "LINK" part is purple. The letter "I" in "LINK" is replaced by a white lightbulb icon with a small shadow underneath it. The logo is set against a white rounded rectangular background.

ECOLINK

Make the
bright choice

Product Catalogue 2024



Illuminating Australia



EcoLink is the missing link for the sparky who wants a no fuss solution that's packed with value.

We strive to give you a quality range you can trust with your everyday go-to products.

**When you're after value,
think EcoLink.**



2 years warranty



20,000 hours



Great value



Cost-efficient and reliable lamps and luminaires



RMC certification

All EcoLink products proudly carry the Regulatory Compliance Mark. So you can have confidence you are installing a product that complies with regulations.



No more straining your eyes

The versatile lamps and luminaires are designed to prevent eye strain with no visible flickering and negligible UV/IR effects.



Category index



Tri-colour Backlit Panel



Dimmable LED Downlight G2



Standard LED Batten



Weatherproof LED Batten



LED Highbay



LED Floodlight G2



LED Lamp B22



LED Lamp E27



Tri-colour Backlit Panel



Available wattage:

Colours available:




*600mm x 600mm pictured

Colour & Material:

Colour: White RAL9003
Aluminium extruded with
Polystyrene optic material

Power (W)	25W	25W	50W
Lumens	3100lm	3100lm	5500lm
CCT	4000K/5000K/ 6500K	4000K/5000K/ 6500K	4000K/5000K/ 6500K
Size	600mmx600mm	300mmx1200mm	600mmx1200mm
Quick code	PANEL6X6CCT	PANEL3X12CCT	PANEL6X12CCT

Power (W)	A (mm)	B (mm)	C (mm)
25W	595	595	34
25W	295	1195	34
50W	595	1195	34

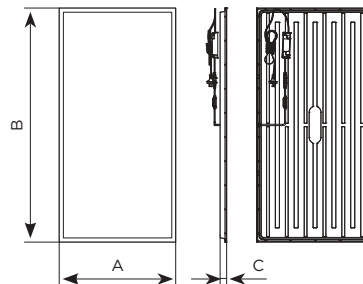

IP20



20,000 hours



2 years warranty



IK02



With plug



800mm (cable)



Dimmable LED Downlight G2



Available wattage:

Colours available:

7W



Colour & Material:

Colour: White RAL9003

Metal-plastic housing


Polycarbonate reflector and optic material

Stainless steel fixations

Frosted lens cover

Power (W)	7W
IC	4
Lumens	800lm
CCT	3000K/4000K/6500K
Size	Ø90mm
Quick code	DOWNLIGHT90CCTG2

Power (W)	A (mm)	B (mm)	C (mm)
7W	62	Ø113	Ø85

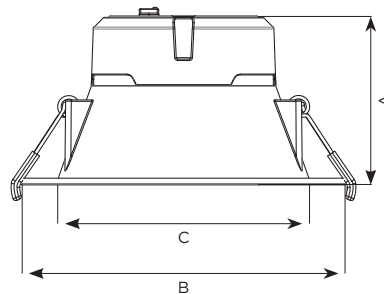

IP44 Front/IP20 Rear



20,000 hours



2 years warranty



Phase Dimmable



With plug



600mm (cable)



Standard LED Batten



Available wattage:

Colours available:




Colour & Material:

Colour: White RAL9003
Housing Steel
Polycarbonate diffuser

Power (W)	20W	40W
Lumens	2000lm & 2100lm	4000lm & 4400lm
CCT	4000K/5000K/ 6500K	4000K/5000K/ 6500K
Size	600mm	1200mm
Quick code	BATTEN600CCT	BATTEN1200CCT

Power (W)	A (mm)	B (mm)	C (mm)
BW307 20W	600	65±1.5	65±1.5
BW307 40W	1135	65±1.5	65±1.5

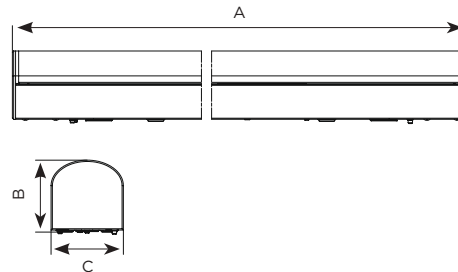

CRI >80



20,000 hours



2 years warranty



Weatherproof LED Batten



Available wattage:

Colours available:





Colour & Material:

Colour: Grey RAL7035

Housing & cover polycarbonate

Power (W)	20W	40W
Lumens	2000lm	4000lm
CCT	4000K/5000K/6500K	4000K/5000K/6500K
Size	600mm	1200mm
Quick code	BATTENWP600CCT	BATTENWP1200CCT

Power (W)	A (mm)	B (mm)	C (mm)	D (mm)	E (mm)	F (mm)	G (mm)	H (mm)	I (mm)	J (mm)
20W	636	620	102	98	330	79	81	407	77	253
40W	1176	1160	102	98	770	79	81	927	157	613

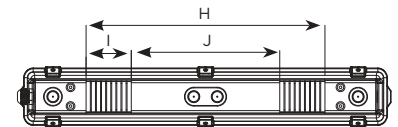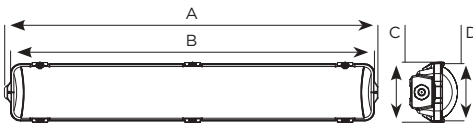

IP65



20,000 hours



2 years warranty



IK08



Back and side
cable entry



Cable cover



LED Highbay



Available wattage:

Colours available:

160W

200W

CW

Colour & Material:


Colour: Black RAL9005

Die-cast aluminium

Glass diffuser

Power (W)	160W	200W
Lumens	20000lm	25000lm
CCT	5000K	5000K
Size	270mm	320mm
Quick code	HIGHBAY160W	HIGHBAY200W
Beam angle	Wide	Wide

Power (W)	A (mm)	B (mm)	C (mm)
160W	270	48	100
200W	320	51	102

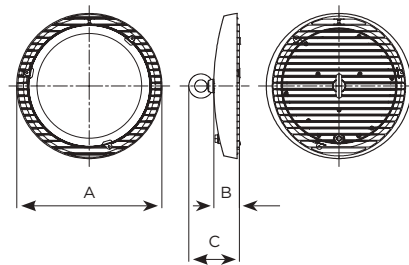

Hook is included



IP65



20,000 hours



2 years warranty



IK06



With plug



800mm (cable)



LED Floodlight G2

Available wattage:



Colours available:




Colour & Material:

Colour: Black RAL9011
Aluminium housing
Glass diffuser

Power (W)	30W	50W	70W	100W	150W	200W
Lumens	2850lm	4750lm	6650lm	9500lm	14250lm	19000lm
CCT	4000K	4000K	4000K	4000K	4000K	4000K
Beam angle	Symmetrical wide	Symmetrical wide	Symmetrical wide	Symmetrical wide	Symmetrical wide	Symmetrical wide
Quick code	FLOOD30WG2	FLOOD50WG2	FLOOD70WG2	FLOOD100WG2	FLOOD150WG2	FLOOD200WG2

Power (W)	A (mm)	B (mm)	C (mm)
30W	193	156	26
50W	213	174	29.5
70W	265	228	32
100W	320	252	33
150W	387	315	39
200W	457	355	39

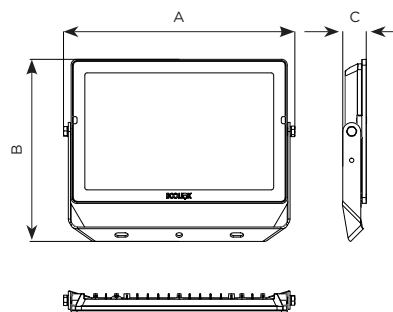

IP65



20,000 hours



2 years warranty



IK07



Operating temperature
-24°C to +40°C



600mm cable length



LED Lamp B22

Available wattage:



Colours available:




Colour & Material:

Colour: Frosted finish
Aluminium housing
Glass diffuser

Power (W)	9W	11W	13W
Lumens	900lm/950lm	1150lm/1250lm	1350lm/1450lm
CCT	3000K/6500K	3000K/6500K	3000K/6500K
Beam angle	150 degrees	150 degrees	150 degrees
Customer order code	9WB223KA60, 9WB226.5KA60	11WB223KA60, 11WB226.5KA60	13WB223KA60 13WB226.5KA60

Power (W)	A (mm)	B (mm)
9W	108	60
9W	108	60
11W	108	60
11W	108	60
13W	120	60
13W	120	60

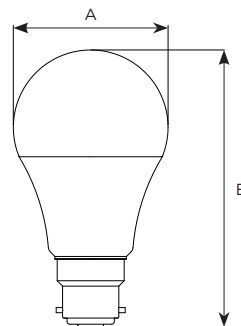

- IP20
- 12,000 hours
- 2 years warranty
- IK02
- B22
- Plastic diffuser



LED Lamp E27

Available wattage:



Colours available:




Colour & Material:

Colour: Frosted finish
Aluminium housing
Glass diffuser

Power (W)	9W	11W	13W
Lumens	900lm/950lm	1150lm/1250lm	1350lm/1450lm
CCT	3000K/6500K	3000K/6500K	3000K/6500K
Beam angle	150 degrees	150 degrees	150 degrees
Customer order code	9WE273KA60, 9WE276.5KA60	11WE273KA60, 11WE276.5KA60	13WE273KA60, 13WE276.5KA60

Power (W)	A (mm)	B (mm)
9W	108	60
9W	108	60
11W	108	60
11W	108	60
13W	120	60
13W	120	60

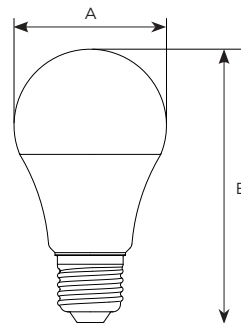

IP20



12,000 hours



2 years warranty



IK02



E27



Plastic diffuser

ecolinklighting.com.au

© 2024 Signify Holding. All rights reserved. The information provided herein is subject to change, without notice. Signify does not give any representation or warranty as to the accuracy or completeness of the information included herein and shall not be liable for any action in reliance thereon. The information presented in this document is not intended as any commercial offer and does not form part of any quotation or contract, unless otherwise agreed by Signify.

Version 2

